

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications  
under 37 CFR 1.53(b))

Attorney Docket No.

001418

Total Pages

First Named Inventor or Application Identifier

Kiyoshi SEIZU

Express Mail Label No.

Check Box, if applicable [ ] Duplicate

APPLICATION ELEMENTS FOR:

**BENT WORK AND BENDING METHOD AND BENDING  
DEVICE USED THEREFOR**

ADDRESS TO:

Director of Patents and Trademarks  
BOX PATENT APPLICATIONS  
Washington, D.C. 20231

1. [XX] Fee Transmittal Form (Incorporated within this form)  
(Submit an original and a duplicate for fee processing)

2. [XX] Specification Total Pages [25]

3. [XX] Drawing(s) (35 USC 113) Total Sheets [16]

4. [XX] Oath or Declaration Total Pages [2]

a. [XX] Newly executed (original)

b. [ ] Copy from prior application (37 CFR 1.63(d)  
(for continuation/divisional with Box 17 completed).

i. [ ] Deletion of Inventor(s)

Signed statement attached deleting inventor(s) named in prior application,  
see 37 CFR 1.63(d)(2) and 1.33(b).

5. [ ] Incorporation by reference (useable if box 4b is checked)

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under  
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.

6. [ ] Microfiche Computer Program (Appendix)

7. [ ] Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)

a. [ ] Computer Readable Copy

b. [ ] Paper Copy (identical to computer copy)

c. [ ] Statement Verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

8. [XX] Assignment Papers (cover sheet and document(s))

9. [ ] 37 CFR 3.73(b) Statement (when there is an assignee)

[XX] Power of Attorney

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications  
under 37 CFR 1.53(b))

Attorney Docket No. **001418**

First Named Inventor or Application Identifier

**Kiyoshi SEIZU**

PAGE 2 OF 3

10. ☐ English translation Document (if applicable)

11. ☐ Information Disclosure Statement ☐ Copies of IDS Citations

12. ☐ Preliminary Amendment

13. [XX] Return Receipt Postcard (MPEP 503)

14. [XX] Small Entity Status is claimed.

15. ☐ Claim for Convention Priority ☐ Certified copy(ies) of Priority Document(s)

a. Priority of \_\_\_\_\_ application no. \_\_\_\_\_ filed on \_\_\_\_\_ is claimed under 35 USC 119.

The certified copies/copy have/has been filed in prior application Serial No. \_\_\_\_\_.

(For Continuing Applications, if applicable).

16. ☐ Other \_\_\_\_\_

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Division ☐ Continuation-in-part (CIP) of prior application no. \_\_\_\_/\_\_\_\_

FEE TRANSMITTAL	Number Filed	Number Extra	Rate	Basic Fee
The filing fee is calculated below				\$710.00
Total Claims	5 - 20		x \$18.00	
Independent Claims	3 - 3		x \$80.00	
Multiple Dependent Claims			\$270.00	
Basic Filing Fee				710.00
Reduction by 1/2 for small entity				- 355.00
Fee for recording enclosed Assignment			\$40.00	40.00
TOTAL				\$395.00

UTILITY PATENT  
APPLICATION TRANSMITTAL

(Only for new nonprovisional applications  
under 37 CFR 1.53(b))

Attorney Docket No.

001418

First Named Inventor or Application Identifier

Kiyoshi SEIZU

PAGE 3 OF 3

[XX] A check in the amount of \$395.00 is enclosed to cover the filing fee of \$355.00 and the assignment recordation fee of \$40.00.

[ ] Please charge our Deposit Account No. **01-2340** in the total amount of \_\_\_\_\_ to cover the filing fee and the \_\_\_\_\_ assignment recordation fee. A duplicate of this sheet is attached.

[XX] The Commissioner is hereby authorized to charge payment for any additional filing fees required under 37 CFR 1.16 or credit any overpayment to Deposit Account No. **01-2340**. A duplicate of this sheet is attached.

18. CORRESPONDENCE ADDRESS



23850

PATENT TRADEMARK OFFICE

SUBMITTED BY

Typed or Printed Name Donald W. Hanson

Reg. No. 27,133

Signature

Date: November 6, 2000

DWH/yap

# SMALL ENTITY DECLARATION

MIHARU CO., LTD.; 1109-2 Nakamura-cho, Sakai-shi, Osaka 591-8012 Japan

APPLICANT OR PATENTEE

SERIAL NO.

PATENT NO.

ATTORNEY'S

DOCKET NO.

(Check one of blocks 1 or 2.)

1. ☐ FILED OR ISSUED

2. ☐ SUBMITTED HEREWITH

FOR BENT WORK AND BENDING METHOD AND BENDING DEVICE USED THEREFOR

(Insert Title)

I(we) hereby declare that I(we) am(are) entitled to the benefit of small entity status with respect to the above-identified application or patent for purposes of paying reduced fees under 35 USC 41(a) & (b) to the U.S. Patent and Trademark Office.

☐ A. INDEPENDENT INVENTOR

I(we) qualify as (an) independent inventor(s) as defined in 37 CFR 1.9(c).

☐ B. INDIVIDUAL NON-INVENTOR

I would qualify as an independent inventor as defined in 37 CFR 1.9(c) if I had made the invention.

☒ C. SMALL BUSINESS CONCERN

I am ☐ THE OWNER ☐ AN OFFICIAL of the small business concern identified below and am empowered to act on behalf of the concern. The concern qualifies under 37 CFR 1.9(d) and 13 CFR 121.3-18. Rights under contract or law have been conveyed to and remain with the concern and are exclusive unless a checkmark is placed here ☐. All other rights belong to small entities as defined in 37 CFR 1.9.

☐ D. NON-PROFIT ORGANIZATION

I am an official empowered to act on behalf of the non-profit organization identified below. The organization qualifies under 37 CFR 1.9(e), sub-section: ☐ (1) ☐ (2) ☐ (3) ☐ (4). Rights under contract or law have been conveyed to and remain with the organization and are exclusive unless a checkmark is placed here ☐. All other rights belong to small entities as defined in 37 CFR 1.9.

I(we) acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b)).

I(we) declare under penalty of perjury under the laws of the United States of America that the foregoing is true and correct.

A. INDEPENDENT INVENTOR(S) B. INDIVIDUAL NON-INVENTOR(S)

Name

Signature

Date

Name

Signature

Date

Name

Signature

Date

C. BUSINESS CONCERN D. NON-PROFIT ORGANIZATION

MIHARU CO., LTD.; 1109-2 Nakamura-cho, Sakai-shi, Osaka 591-8012 Japan

Name of Concern or Organization

Address

By

Kiyoshi SEIZU

Name of Person Signing

Signature

*Kiyoshi Seizu*

Title

President

OCT. 30. 2000

Date

**BENT WORK AND BENDING METHOD AND BENDING DEVICE USED  
THEREFOR**

**BACKGROUND OF THE INVENTION**

**1. Field of the Invention**

The present invention relates to a bent work to be used as a bearing-receiving unit and the like for construction machinery, a bending method for manufacturing the same, and a bending device to be used therefor.

**2. Description of the Related Art**

Generally, construction machinery such as a hydraulic shovel includes, as shown in Fig. 19, a lower moving unit 51 and an upper rotational unit 52 rotatably supported by the lower moving unit 51. The upper rotational unit 52 is rotatably mounted on the lower moving unit 51 via a bearing-receiving unit 53 fixed to the lower moving unit 51 and a bearing (not shown) fixing to the bearing-receiving unit 53. As shown in Figs. 20 to 22, the bearing-receiving unit 53 includes a cylindrical part 54, and a flange 55 protruding toward the outside or outwardly at the upper end of the cylindrical part 54. The flange 55 is provided with a number of through-holes 55a (four through-holes 55a are shown in Figs. 20 and 21) formed in the flange 55 for receiving bolts (not shown) for fixing the bearing. The bearing-receiving unit 53 must have a strength sufficient to

support the bearing thereon. The cylindrical part 54 and the flange 55 are made of a thick steel plate (the cylindrical part 54 is thinner than the flange 55).

Hitherto, the bearing-receiving unit 53 has been manufactured in a manner such that a first member 57 made of a thick steel plate bent in a cylindrical shape and a second member 58 made of a thick steel plate bent in an annular shape are welded to each other (see Figs. 23 and 24). In Fig. 24, welds 59 are shown. In Fig. 23, the first and second members 57 and 58 are welded to each other butt-welds 57a and 58a, respectively. A roll-forming method for manufacturing the first and second members 57 and 58, as shown in Figs. 25 to 29, is disclosed in, for example, Japanese Unexamined Patent Application Publication No. 7-314050.

In the roll-forming method, four rolls, which are a pair of upper and lower press-rollers 61 and 62, an inlet assist roller 63 disposed at the inlet side, and an outlet assist roller 64 disposed at the outlet side, are used. A metallic plate 65 is placed in a working position, as shown in Fig. 25. The upper roller 61 moves downward to be pressed to the lower roller 62, thereby pressing so as to hold the metallic plate 65, as shown in Fig. 26. The upper and lower rollers 61 and 62 as a unit pivot in a direction moving the metallic plate 65 away from the inlet assist

roller 63, thereby bending the metallic plate 65 at an end thereof, as shown in Fig. 27. The outlet assist roller 64 moves so as to come into contact with the transferred metallic plate 65 at the end thereof, and the upper and lower rollers 61 and 62 are restored to the original position while the upper and lower rollers 61 and 62 rotate so as to transfer the metallic plate 65 toward the outlet side, as shown in Fig. 28. Then, the upper and lower rollers 61 and 62 and the outlet assist roller 64 bend the metallic plate 65, as shown in Fig. 29. The metallic plate 65 is welded at ends thereof (not shown), whereby cylindrical works such as the first and second members 57 and 58 are formed.

However, when the individually manufactured first and second members 57 and 58 are welded so as to form an integral structure, considerable labor and time are required in processes of setting the first and second members 57 and 58 for welding, and sufficient strength cannot be obtained. In addition, the appearance is not good due to the welds of the first and second members 57 and 58 being exposed. Moreover, two sets of bending devices are required because the first and second members 57 and 58 are individually manufactured. Therefore, forging may be used for forming the bearing-receiving unit 53 in an integral structure. However, a forging device is expensive, thereby increasing

the cost.

#### SUMMARY OF THE INVENTION

Accordingly, it is an object of the present invention to provide a low-cost bent work and bending method and a bending device therefor, in which a bent work such as a bearing-receiving unit can be manufactured in an integral structure, thereby omitting welding processes and improving the strength and the appearance of the work, and the bent work can be manufactured by one bending device at low cost.

To these ends, according to a first aspect of the present invention, a bent work is obtained by a method comprising the steps of preparing a belt-shaped thick steel material having an L-shaped cross-section; forming a cylinder by bending the belt-shaped thick steel material having an L-shaped cross-section; and welding ends of the belt-shaped thick steel material formed into the cylinder to each other.

According to a second aspect of the present invention, a bending method comprises the steps of providing a belt-shaped thick steel material having one of an L-shaped cross-section and a U-shaped cross-section; and forming the material into a cylinder by using a center roller to be driven to rotate which is positioned and fixed in a predetermined position and a pair of bending rollers to be



driven to rotate which is disposed opposing the center roller at one side of the center roller, movable toward and away from the center roller. The belt-shaped thick steel material having one of an L-shaped cross-section and a U-shaped cross-section is bent by being transferred between the center roller and the pair of bending rollers.

According to a third aspect of the present invention, a bending device, for forming a cylinder by bending a belt-shaped thick steel material, comprises a center roller to be driven to rotate positioned and fixed in a predetermined position; and a pair of bending rollers to be driven to rotate disposed opposing the center roller at one side of the center roller, movable toward and away from the center roller, the belt-shaped thick steel material being bent by being transferred between the center roller and the pair of bending rollers. The center roller is provided with an annular recess formed therein around the center roller. The pair of bending rollers are respectively provided with annular convex portions formed thereon around the bending rollers. The convex portions can be inserted in the annular recess of the center roller at a predetermined position of the annular recess of the center roller. The belt-shaped thick steel material having one of an L-shaped cross-section and a U-shaped cross-section is transferred between the center roller and the pair of bending rollers in a manner

such that a concave portion of the belt-shaped thick steel material having one of an L-shaped cross-section and a U-shaped cross-section faces toward the outside at the annular recess of the center roller and the convex portions of the pair of bending rollers are positioned in the concave portion of the belt-shaped thick steel material having one of an L-shaped cross-section and a U-shaped cross-section.

According to the present invention, the bent work is formed by bending a belt-shaped thick steel plate having an L-shaped cross-section and welding the steel plate at the ends thereof, thereby forming a cylinder. The cylinder having an L-shaped section can be manufactured in one bending process. It is not necessary to manufacture first and second members 57 and 58 individually, and to combine the first and second members 57 and 58 by welding, as in a known technology. The welding process of assembling the first and second members 57 and 58 can be omitted, according to the present invention. The strength of the bent work according to the present invention is greater than that of the known work because the bent work according to the present invention is integrally formed. The appearance of the bent work is superior to that of the known work in which the welding points of the first and second members 57 and 58 are exposed. The bent work according to the present invention only requires one bending process using one

bending device. Because the bent work according to the present invention is formed by bending, the costs are lower than that work which is formed by forging. The bent work according to the present invention may be most appropriately used as a bearing-receiving unit for construction machinery. The steel material used according to the present invention may be a flat steel plate or may be a rolled plate. The rolled plate has an advantage in that a cutting process and the like for making the bent work according to the present invention into a finished product are simple because the shape of the rolled plate can be made, when rolling, close to that of the finished product. The thick steel material includes a steel plate having a thickness of not less than 20 mm. Therefore, the thick steel material does not include a material such as a steel angle.

By the bending method and by the bending device according to the present invention, a cylinder for forming the bent work, which offers the above-described advantages, can be manufactured. By the bending method and by the bending device according to the present invention, when a U-shaped thick steel plate is used, a cylinder formed by bending the U-shaped thick steel plate may be cut at an intermediate part in a direction perpendicular to the axis thereof into two cylinders, yielding two products each having an L-shaped cross-section.

When the bending device has a configuration in which a pressing roller is rotatably disposed opposing a center roller so as to move toward and away from the center roller and to be inserted in an annular recess formed around the center roller at the periphery of the pressing roller, a highly accurately bent work can be obtained by pressing a thick steel material at a thinner portion thereof by the pressing roller so as to prevent the thick steel material from deformation at the thinner portion thereof.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a perspective view of a bent work according to an embodiment of the present invention;

Fig. 2 is a cross-sectional view of the bent work shown in Fig. 1.

Fig. 3 is a perspective view of a thick steel material;

Fig. 4 is a perspective view of a bearing-receiving unit used in a hydraulic shovel;

Fig. 5 is a plan view of a bending device;

Fig. 6 is an illustration showing an important portion of the bending device shown in Fig. 5;

Fig. 7 is an illustration of a top roller used in the bending device shown in Fig. 5;

Fig. 8 is an illustration of a bottom roller used in the bending device shown in Fig. 5;

Fig. 9 is an illustration showing an operation of the bending device shown in Fig. 5;

Fig. 10 is an illustration showing another operation of the bending device shown in Fig. 5;

Fig. 11 is an illustration showing another operation of the bending device shown in Fig. 5;

Fig. 12 is an illustration showing another operation of the bending device shown in Fig. 5;

Fig. 13 is an illustration showing another operation of the bending device shown in Fig. 5;

Fig. 14 is a perspective view of a cylindrical work formed by the bending device shown in Fig. 5;

Fig. 15 is a cross-sectional view of the cylindrical work shown in Fig. 14;

Fig. 16 is an illustration of an important portion of a modified example of the bending device shown in Fig. 5;

Fig. 17 is an illustration of a top roller used in the bending device shown in Fig. 16;

Fig. 18 is an illustration of a bottom roller used in the bending device shown in Fig. 16;

Fig. 19 is a perspective view of a bearing-receiving unit used in a hydraulic shovel;

Fig. 20 is a perspective view of a known bearing-receiving unit used in a hydraulic shovel;

Fig. 21 is a plan view of the known bearing-receiving

unit shown in Fig. 20;

Fig. 22 is a front view of the known bearing-receiving unit shown in Fig. 20;

Fig. 23 is a perspective view of a first member and a second member forming the known bearing-receiving unit shown in Fig. 20;

Fig. 24 is a cross-sectional view of the known bearing-receiving unit integrally formed with the first and second members welded to each other;

Fig. 25 is an illustration showing a known roll-forming method;

Fig. 26 is an illustration showing the known roll-forming method;

Fig. 27 is an illustration showing the known roll-forming method;

Fig. 28 is an illustration showing the known roll-forming method; and

Fig. 29 is an illustration showing the known roll-forming method.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

Embodiments according to the present invention are described below with reference to the drawings.

Figs. 1 and 2 show a bent work according to an embodiment of the present invention. According to the

embodiment, the bent work is manufactured as a bearing-receiving unit 5 (see Fig. 4) for a hydraulic shovel. In these drawings, a cylindrical part 1 is formed in a manner such that the periphery thereof is formed so as to expand to the outside gradually toward the upper portion thereof. A flange 2 is formed protruding toward the outside or outwardly from the periphery of the cylindrical part 1 at the upper portion thereof. A butt-weld 3 is shown in Figs. 1 and 4. Such a bent work is formed with a material having an L-shaped cross-section bent in a circle and butt-welded at the ends thereof. In particular, a belt-shaped thick rolled steel plate 4 having a U-shaped cross-section as shown in Fig. 3 is bent into a cylinder so that ribs 4a of the steel plate 4 are disposed at the outer periphery of the cylinder. The thick rolled steel plate 4 formed in a cylinder then is cut at an intermediate part between the ribs 4a in the longitudinal direction thereof. Two cut portions formed in a cylinder are butt-welded at the longitudinal ends of the individual cut-portions, thereby forming two cylinders, each having an L-shaped cross-section.

As is shown in Fig. 3, the thick rolled steel plate 4 in a U-shaped cross-section is thinner at a major portion 4b thereof than at the ribs 4a. That is, the thickness of the major portion 4b increases gradually from an intermediate part between the ribs 4a toward the ribs 4a so that a

concave face 4c of the U-shaped steel plate 4 is curved to the outside toward the respective ribs 4a. As shown in Fig. 4, the flange 2 is provided with a number of bolt-passing holes 2a (four bolt-passing holes 2a are shown in Fig. 4) formed therein. The cylinder thus formed is machined at predetermined portions to predetermined sizes, thereby manufacturing the bearing-receiving unit 5 for a hydraulic shovel.

The cylinder formed by bending the thick steel plate 4 is manufactured by a bending device shown in Fig. 5. The bending device includes a top roller unit (center roller) 11, a pair of bottom roller units (bending rollers) 12 and 13, a pair of supporting rollers 14 and 15, and a pressing roller 16.

In Fig. 6, the top roller unit 11 includes a pair of rollers 21 and 22 having the same outer diameters, and an intermediate roller 23 having an outer diameter smaller than those of the pair of rollers 21 and 22, the rollers 21, 22, and 23 being fixed to each other by screws (not shown) or the like. The top roller unit 11 is provided with a recess (annular recess portion) 11a formed by the rollers 21 to 23 around the top roller unit 11. The thick rolled steel plate 4 is transferred with the ribs 4b thereof in contact with the top roller unit 11 at the corners of the recess 11a and with the concave face 4c of the rolled steel plate 4 toward



the outside (see Fig. 7).

The three rollers 21 to 23 are individually fixed to a top shaft 24. The top shaft 24 is rotatably supported by a lower bearing (not shown) fixed to a bottom plate (not shown) and an upper bearing fixed to a pair of base plates 25 and 26. The top shaft 24 is connected to a hydraulic motor (not shown) at the lower end thereof. An upper cover 28 is provided over the top shaft 24 fixed by a bolt 29. In Fig. 6, a cylindrical cover 30 is fixed to the upper and lower base plates 25 and 26. The upper bearing 27 is fixed to the cylindrical cover 30 at the upper part thereof. A rib 30a extends from the cylindrical cover 30.

As illustrated in Fig. 6, each of the bottom roller units 12 and 13 includes a pair of rollers 31 and 32 having the same outer diameter, and an intermediate roller 33 having an outer diameter greater than those of the pair of rollers 31 and 32, the rollers 31, 32, and 33 being fixed to each other by screws (not shown) or the like. The outer periphery of the intermediate roller 33 is formed so as to mate with the concave face 4c between the ribs 4b of the thick rolled steel plate 4. The bottom roller units 12 and 13 are provided with convex portions (annular convex portions) 12a and 13a, respectively, formed by the rollers 31 to 33 around the peripheries of the bottom roller units 12 and 13, respectively. The thick rolled steel plate 4 is

transferred with the major portion 4a and the ribs 4b thereof in contact with the bottom roller units 12 and 13 at the convex portions 12a and 13a thereof, respectively, in a manner such that the convex portions 12a and 13a are disposed in a recess of the steel plate 4 formed with the ribs 4b and the major portion 4a thereof (see Fig. 8).

The rollers 31 to 33 of each bottom roller unit 12 or 13 are respectively fixed to a bottom shaft (not shown). The bottom shafts, to which the rollers 31 to 33 of the bottom roller units 12 and 13 are fixed, are connected to individual hydraulic motors (not shown), whereby the bottom shafts are driven so as to rotate. The two bottom shafts are connected individually to cylinders 34 and 35, whereby the bottom roller units 12 and 13 are capable of individual movement directly toward and away from the top roller unit 11. In Fig. 5, covers 36 and 37 are fixed by screws 38 and 39, respectively, at the upper parts of the bottom shafts of the bottom roller units 12 and 13, respectively.

The supporting rollers 14 and 15 are rotatably mounted on shafts (not shown) fixed to receiving cases 40 and 41, respectively. The receiving cases 40 and 41 are connected to pivoting cylinders 42 and 43, respectively, whereby the supporting rollers 14 and 15 can be moved in a horizontal direction toward and away from the bottom roller units 12 and 13, respectively. The supporting rollers 14 and 15 can

also move vertically by actuation of cylinders (not shown) disposed in directions to that effect.

The pressing roller 16 is rotatably disposed opposing the top roller unit 11. The pressing roller 16 presses the thick rolled steel plate 4 at the major portion 4b thereof, which is thinner than the ribs 4a, the rolled steel plate 4 being transmitted at the recess 11a of the top roller unit 11, so that the thick rolled steel plate 4 is not deformed during bending. The pressing roller 16 is connected to a cylinder 44, whereby the pressing roller 16 can be moved directly toward and away from the top roller unit 11.

With the configuration described above, when a bent work is manufactured, the top roller unit 11, the bottom roller units 12 and 13, and the pressing roller 16 are positioned accordingly, the thick belt-shaped rolled steel plate 4 having a U-shaped cross-section is transferred by a forklift truck or the like (not shown), and the rolled steel plate 4 is charged from the side of the bottom roller unit 12 between the top roller unit 11, the bottom roller units 12 and 13, and the pressing roller 16, as shown in Fig. 9. In this case, the thick rolled steel plate 4 is positioned at the recess 11a of the top roller unit 11, at the convex portions 12a and 13a of the bottom roller units 12 and 13, respectively, and at the periphery of the pressing roller 16. The thick rolled steel plate 4 is supported at the lower

edge thereof by the supporting rollers 14 and 15. In Fig. 10, the bottom roller units 12 and 13 are moved toward the top roller unit 11 in directions A while the rollers 11 to 13 are driven so as to rotate, whereby the thick rolled steel plate 4 moves in a direction B so as to be formed into a circle. When a point 4d adjacent to an end portion 4e of the thick rolled steel plate 4 reaches the bottom roller unit 12, as shown in Fig. 11, a straight part of the end portion 4e is cut away and the portion adjacent point 4d is bent in a arc, as shown in Fig. 12. In this case, the bottom roller unit 13 and the pressing roller 16 are withdrawn (the pressing roller 16 is not shown in Fig. 12). Then, the rollers 11 to 13 rotate in a reverse direction, and a portion 4f adjacent to the other end portion of the thick rolled steel plate 4 is bent in a arc in the same manner as the portion adjacent point 4d described above, whereby a cylinder 10 is formed, as shown in Fig. 13 (the pressing roller 16 is not shown in Fig. 13). The cylinder 10 thus formed is shown in Figs. 14 and 15. The cylinder 10 having a U-shaped cross-section is cut at an intermediate part of the major portion 4b in a direction perpendicular to the axis thereof along a dashed line shown in Fig. 15. Two cut parts of the cylinder 10 are individually butt-welded at the longitudinal ends of each cut part of the cylinder 10, whereby two bent works are manufactured, one of which is

shown in Fig. 1. The longitudinal ends of the thick rolled steel plate 4 forming the cylinder 10 are shown by line 10a in Fig. 14.

The cylinder 10 for forming two bearing-receiving units 5 for a hydraulic shovel is formed by bending the belt-like thick rolled steel plate 4 having a U-shaped cross-section by using one bending machine in one bending process in which welding is minimized. The thick rolled steel plate 4 thus forming the cylinder 10 is cut into two pieces in the longitudinal direction of the thick rolled steel plate 4, and each piece is butt-welded to itself at the longitudinal ends thereof. Each obtained bent work is strong, has a superior appearance, and has a low cost.

Fig. 16 shows a modified example of the bending device according to the invention. In this embodiment of the bending device, a thick rolled steel plate 4 having an L-shaped cross-section is used, as shown in Fig. 17. The top roller unit 11 includes an upper roller 46a, a lower roller 46b having an outer diameter smaller than that of the upper roller 46a, and an intermediate roller 46c having an outer diameter smaller than that of the lower roller 46b, the rollers 46a, 46b, and 46c being fixed to each other by screws or the like (not shown). The top roller unit 11 is provided with a recess 11a formed by the rollers 46a, 46b, and 46c around the periphery of the top roller unit 11. The

thick rolled steel plate 4 having an L-shaped cross-section is transferred with a vertical end 4b thereof in contact with the top roller unit 11 at a corner of the recess 11a and with a concave face 4c of the rolled steel plate 4 toward the outside (see Fig. 17). In Fig. 17, a horizontal end 4a of the L-shaped thick rolled steel plate 4 is disposed at the end thereof opposite to the vertical end 4b.

Each of the bottom roller units 12 and 13 includes an upper roller 47a, and a lower roller 47b having an outer diameter greater than that of the upper roller 47a, the rollers 47a and 47b being fixed to each other by screws or the like (not shown). Each bottom roller unit 12 or 13 is provided with a convex portion 12a or 13a, respectively, formed around the periphery thereof. The thick rolled steel plate 4 is transferred with the horizontal end 4a and the vertical end 4b thereof in contact with the bottom roller units 12 and 13 at the convex portions 12a and 13a thereof, respectively, in a manner such that the convex portions 12a and 13a are inserted in the concave face 4c of the L-shaped rolled steel plate 4 (see Fig. 18). Other arrangements are the same as that in the case in which the U-shaped rolled steel plate 4 is used as described previously with reference to Figs. 1 to 15. The same reference numerals are used for describing the same or similar components as those used in that embodiment.

By using this modified embodiment of the bending device, one cylinder having an L-shaped cross-section can be manufactured. The same effects can be obtained in the same operation as that in the case in which the U-shaped rolled steel plate 4 is used.

The top roller unit 11 and the bottom roller units 12 and 13 used in the bending device according to the present embodiments may be individually formed as an integral unit instead being an assembly of a plurality of component rollers.

According to the present invention, as described in the embodiments, the bent work is formed by bending a belt-shaped thick steel plate having an L-shaped cross-section and butt-welding the steel plate at the ends thereof, thereby forming a cylinder. The cylinder having an L-shaped section can be manufactured in one bending process. Consequently, it is not necessary to manufacture the first and second members 57 and 58 individually, and to combine the first and second members 57 and 58 by welding, as in a known technology. Therefore, the welding process of assembling the first and second members 57 and 58 can be omitted. Furthermore, the strength of the bent work according to the present invention is greater than that of the known work because the bent work according to the present invention is integrally formed. The appearance of

the bent work is superior to that of the known work in which welding points of the members 57 and 58 are exposed. The bent work according to the present invention only requires one bending process using one bending device. Because it is formed by bending, it has lower costs than that which is formed by forging. The bent work according to the present invention is most appropriately used as a bearing-receiving unit for construction machinery.

In the bending method and by using the bending device according to the present invention, a cylinder for forming the bent work, which offers the above-described advantages, can be manufactured. By the bending method and by the bending device according to the present invention, when a U-shaped thick steel plate is used, the U-shaped thick steel plate which is bent so as to be formed in a cylinder is cut into two pieces in the longitudinal direction of the U-shaped thick steel plate at a widthwise intermediate part thereof, each resultant piece has an L-shaped cross-section.

When the bending device has a configuration in which a pressing roller is rotatably disposed opposing the center roller so as to move toward and away from the center roller and to be inserted in an annular recess formed around the center roller at the periphery of the pressing roller, a highly accurately bent work can be obtained by pressing a thick steel plate at a thinner portion thereof by the



pressing roller so as to prevent the thick steel plate from deformation at the thinner portion thereof.

**WHAT IS CLAIMED IS:**

1. A bent work manufactured by a method comprising the steps of:

preparing a belt-shaped thick steel material having an L-shaped cross-section;

forming a cylinder by bending the belt-shaped thick steel material having an L-shaped cross-section; and

welding ends of the belt-shaped thick steel material formed into the cylinder to each other.

2. A bent work according to Claim 1, wherein the bent work is used as a bearing-receiving unit for construction machinery.

3. A bending method comprising the steps of:

providing a belt-shaped thick steel material having one of an L-shaped cross-section and a U-shaped cross-section; and

forming the material into a cylinder by using a center roller to be driven to rotate which is positioned and fixed in a predetermined position and a pair of bending rollers to be driven to rotate which is disposed opposing the center roller at one side of the center roller, movable toward and away from the center roller, the belt-shaped thick steel

material having one of an L-shaped cross-section and a U-shaped cross-section being bent by being transferred between the center roller and the pair of bending rollers.

4. A bending device for forming a cylinder by bending a belt-shaped thick steel material, the bending device comprising:

a center roller to be driven to rotate positioned and fixed in a predetermined position; and

a pair of bending rollers to be driven to rotate disposed opposing the center roller at one side of the center roller, movable toward and away from the center roller, the belt-shaped thick steel material being bent by being transferred between the center roller and the pair of bending rollers,

wherein the center roller is provided with an annular recess formed therein around the center roller, the pair of bending rollers are respectively provided with annular convex portions formed thereon around the bending rollers, the convex portions to be inserted in the annular recess of the center roller at a predetermined position of the annular recess of the center roller, and the belt-shaped thick steel material having one of an L-shaped cross-section and a U-shaped cross-section is transferred between the center roller and the pair of bending rollers in a manner such that

a concave portion of the belt-shaped thick steel member having one of an L-shaped cross-section and a U-shaped cross-section faces toward the outside at the annular recess of the center roller and the convex portions of the pair of bending rollers are positioned in the concave portion of the belt-shaped thick steel material having one of an L-shaped cross-section and a U-shaped cross-section.

5. A bending device according to Claim 4, further comprising:

a pressing roller rotatably disposed opposing the center roller, movable toward and away from the center roller, to be inserted at the periphery of the pressing roller in the annular recess of the center roller at a predetermined position of the annular recess.

**ABSTRACT OF THE DISCLOSURE**

A bent work is integrally formed at low cost by bending a belt-shaped thick steel material having an L-shaped cross-section so as to form a cylinder and by welding ends of the belt-shaped thick steel material to each other, the bent work being used as a bearing-receiving unit or the like.

00705750-100000

Fig. 1

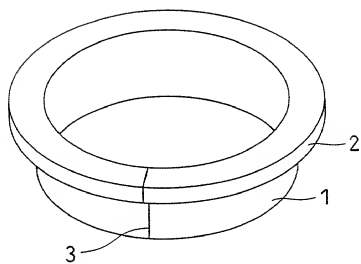


Fig. 2



Fig. 3

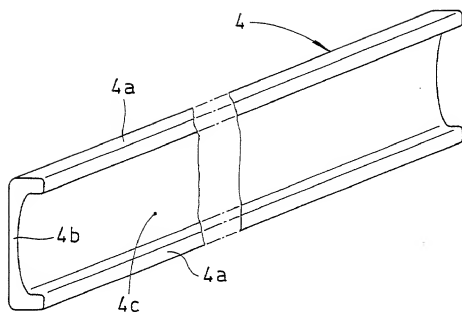


Fig. 4

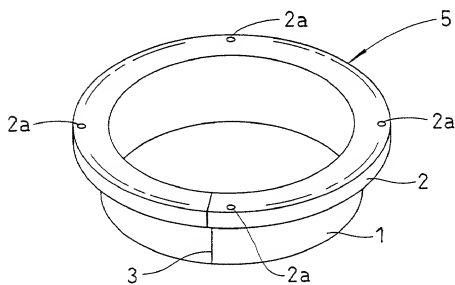


Fig. 5

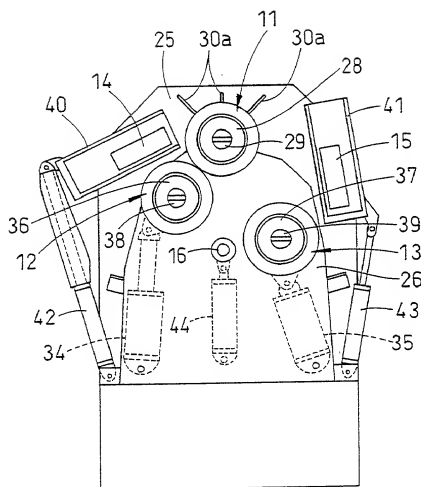




Fig. 6

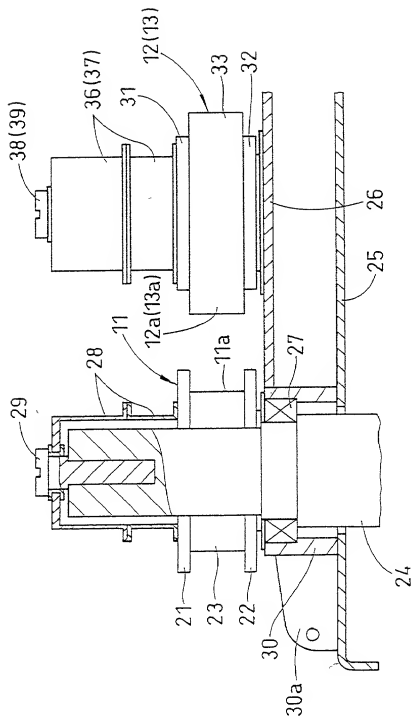


Fig. 7




Fig. 8




Fig. 9

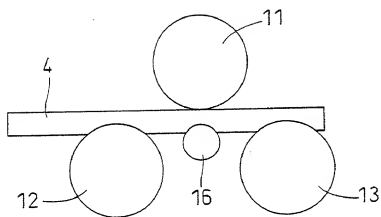


Fig. 10

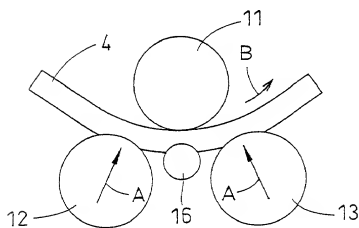


Fig. 11




Fig. 12




Fig. 13




Fig. 14


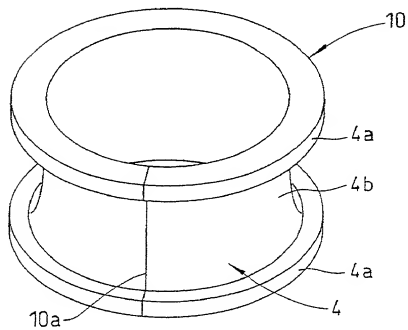


Fig. 15

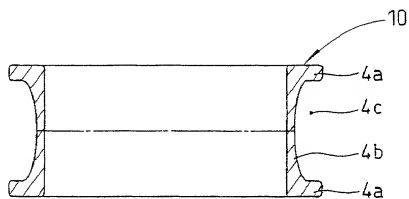

09705750-110000

Fig. 16

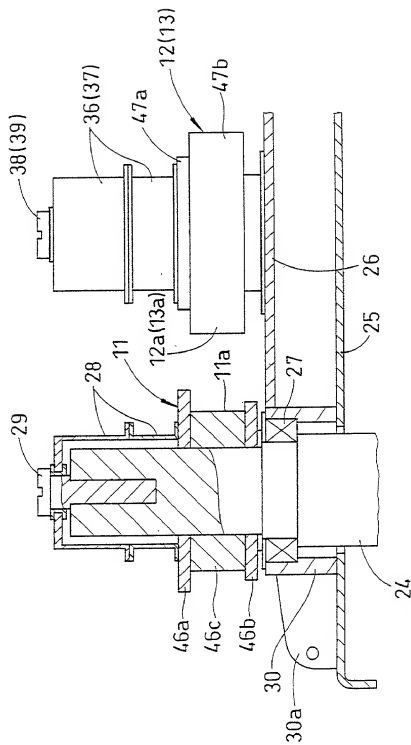


Fig. 17




Fig. 18






Fig. 19 PRIOR ART

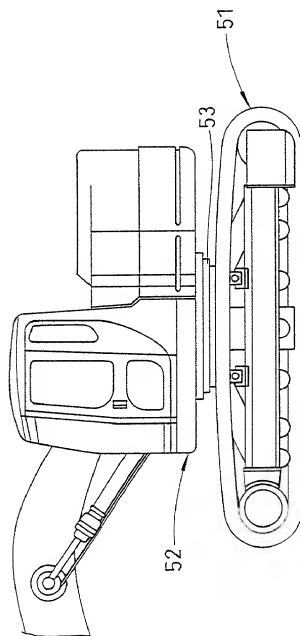


Fig. 20 PRIOR ART

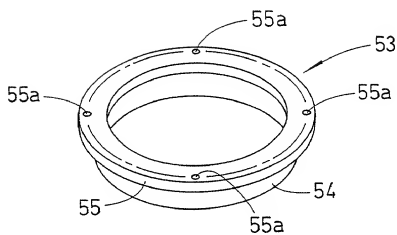


Fig. 21 PRIOR ART

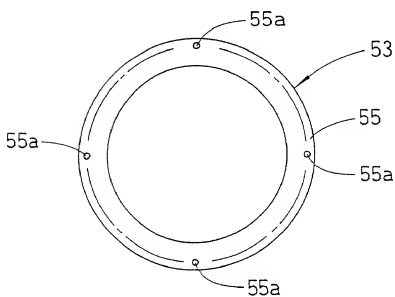


Fig. 22

PRIOR ART




Fig. 23

PRIOR ART

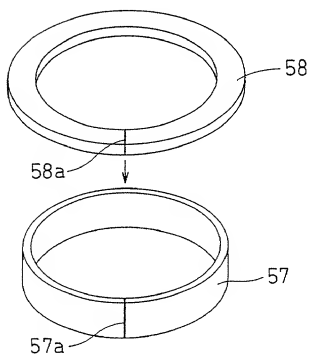


Fig. 24

PRIOR ART




Fig. 25

PRIOR ART




Fig. 26

PRIOR ART




Fig. 27      PRIOR ART




Fig. 28 PRIOR ART





Fig. 29 PRIOR ART



**Declaration for U.S. Patent Application**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention **entitled**  
(Insert Title) **BENT WORK AND BENDING METHOD AND BENDING DEVICE USED THEREFOR**

the specification of which is attached hereto unless the following is checked

☐ was filed on \_\_\_\_\_ as United States Application Number or PCT International Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 (a) - (d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application for which priority is claimed:

				Priority Claimed
(List prior foreign applications. See note A on back of this page)	2000-259811 (Number)	Japan (Country)	29/August/2000 (Day/Month/Year Filed)	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
	(Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No
	(Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No
	(Number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes <input type="checkbox"/> No

(See note B on back of this page) \_\_\_\_\_ See attached list for additional prior foreign applications

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

(List Prior U.S. Applications)	(Appln. Serial No.)	(Filing Date)	(Status: Patented, Pending, Abandoned)
	(Appln. Serial No.)	(Filing Date)	(Status: Patented, Pending, Abandoned)
	(Appln. Serial No.)	(Filing Date)	(Status: Patented, Pending, Abandoned)
	(Appln. Serial No.)	(Filing Date)	(Status: Patented, Pending, Abandoned)

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

James E. Armstrong, III, Reg. No. 18,366; William F. Westerman, Reg. No. 29,988; Ken-Ichi Hattori, Reg. No. 32,861; Le-Nhung McLeland, Reg. No. 31,541; Ronald F. Naughton, Reg. No. 24,616; William G. Kratz, Jr., Reg. No. 22,631; Mel R. Quintos, Reg. No. 31,898; Donald W. Hanson, Reg. No. 27,133; Stephen G. Adrian, Reg. No. 32,878; Scott M. Daniels,

Reg. No. 32,562; James P. Welch, Reg. No. 17,379; John R. Pegan, Reg. No. 18,069; John F. Carney, Reg. No. 20,276; Edward F. Welsh, Reg. No. 22,455; William L. Brooks, Reg. No. 34,129; John P. Kong, Reg. No. 40,054; James E. Armstrong, IV, Reg. No. 42,266; Nicholas E. Seckel, Reg. No. 44,373; Raymond J. Ho, Reg. No. 41,838; Thomas E. Brown, Reg. No. 44,450; and James N. Baker, Reg. No. 40,899.

Please direct all communications to the following address:

ARMSTRONG, WESTERMAN, HATTORI,  
McLELAND & NAUGHTON  
1725 K Street, N.W., Suite 1000  
Washington, D.C. 20006  
Telephone: (202) 659-2930 Fax: (202) 887-0357

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18 of the United States Code, § 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

(See note C  
above)

Full name of sole or first inventor (given name, family name) Kiyoshi SEIZU  
Inventor's signature Kiyoshi Seizu Date OCT. 30. 2000  
Residence Osaka, Japan Citizenship Japanese  
Post Office Address 25-43 Tamate-cho, Kashiwara-shi, Osaka 582-0028 Japan

Full name of second inventor (given name, family name) \_\_\_\_\_

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name of third inventor (given name, family name) \_\_\_\_\_

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name of fourth inventor (given name, family name) \_\_\_\_\_

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name of fifth inventor (given name, family name) \_\_\_\_\_

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name of sixth inventor (given name, family name) \_\_\_\_\_

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name of seventh inventor (given name, family name) \_\_\_\_\_

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full name of eighth inventor (given name, family name) \_\_\_\_\_

Inventor's signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_ Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_